

PP4

EXTREMELY COMPACT LOUDSPEAKER SYSTEM



- 4" Cone Full Range Driver with 1" Voice Coil Sealed Enclosure
- Wide-Range Frequency Response Loudspeaker
- High-Quality Distributed System, Paging and Music, Surround
- Low Distortion Maximize Intelligibility
- Audio for Museum & Exhibition Displays
- Custom Color Available
- Flexible Mounting Options for Easy Installation

Product Information


PP4 loudspeaker is extremely compact and wide-range loudspeaker for high quality distributed system applications. PP4 comprises a single 100 mm (4") water-resistant cone driver with 16 Ω nominal impedance and 25 mm (1") voice coil mounted in a sealed enclosure of Birch Plywood of 14 mm and Plywood of 6 mm curved on sides. PP4 can be mounted using U-Bracket. Despite the ultra-low size 140 mm x 145 mm, it surprises in the natural timbre sound. The cabinet finish can be customized on request.

Data Sheet

Frequency Response	±5 dB 120 Hz ~ 18 KHz -10 dB 110 Hz
Sensitivity (1 Watt @ 1 m) Max SPL Calculated	90 dB 108 dB
Nominal Input Impedance (Ω)	16 Ω
Power Handling (Watts Cont. AES) Peak Power	60 W 240 W
Nominal Dispersion (@ -6 dB)	80° (H) x 80° (V)
Dimensions mm (±1 mm) (H x W x D)	141 x 128 x 145
Weight	1,5 Kg

Enclosure Material

- Enclosure Material: Birch Plywood of 14 mm and 6 mm on sides
- Finish: Texture Polyurethane Black Paint
- Suspension: U Bracket System
- Grille: Powder Coated Perforated Steel with anti-dust foam
- Connectors: Black and Red Clamps

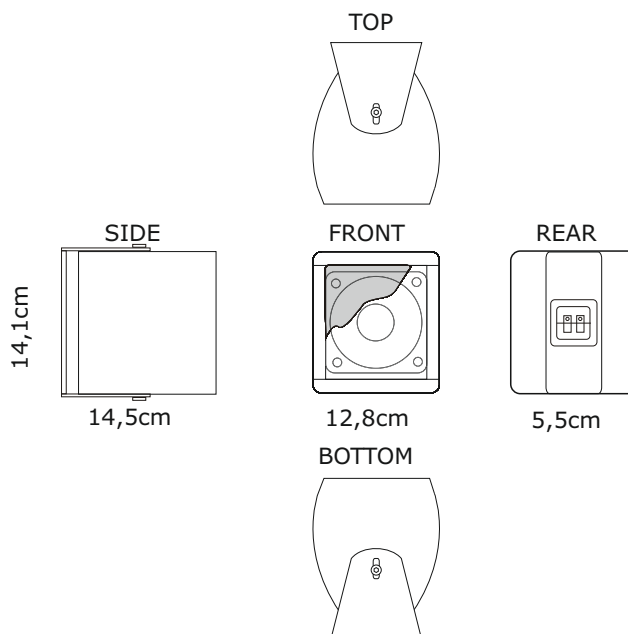

INSTALL | EVENTS